


Thank you for buying our product. The following instructions will guide you through the process of mounting ThermalCapture Grabber USB 2.0 to a FLIR TAU 2 core. Please read these instructions carefully before you begin.

Step 1: Remove the VPC Module


If your FLIR TAU 2 core has a VPC-module attached, please remove it by loosening the marked screws. The VPC-module and the two screws are not needed in the following process and can be put away.

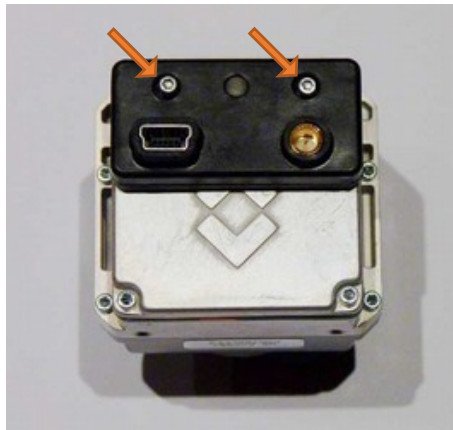

Step 2: Remove the back cover

Remove the back cover by loosening the marked screws. The back cover and the four screws are not needed in the following process and can be put away.

Caution: This will also release the mainboard of the FLIR Tau 2 core. It will be kept in place only by its internal wiring. Do not apply strong forces to the mainboard at this and the following step. The internal wiring pulls the mainboard down at the upper side of the TAU core, so that the mainboard moves a little bit up at the other side when the screws are released.


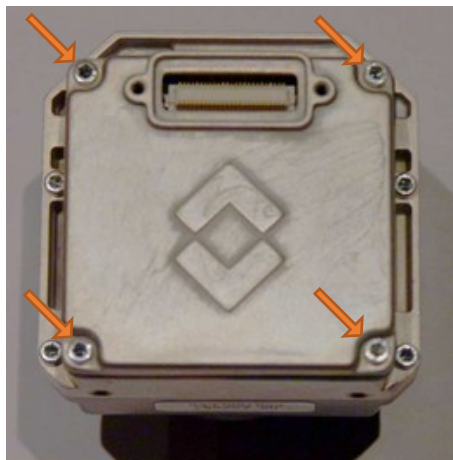


At the end of this step your TAU core should look like this:





Step 3: Place the circuit board onto the base plate

Place the base plate on a flat surface and place the circuit board on it. The rounded edges should be facing away from you, such that the USB plug points to the left side.

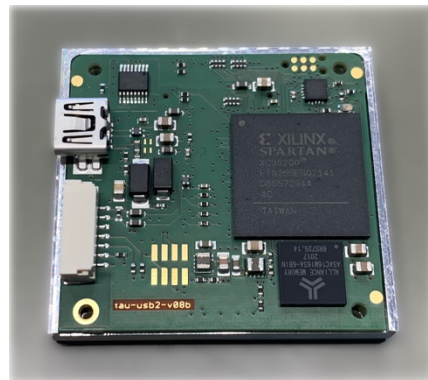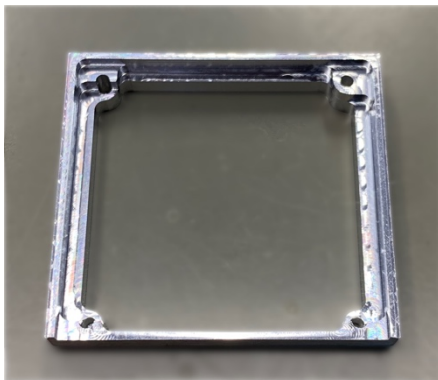



Step 4: Apply the back cover

Cover the circuit board with the back cover and place the four included M1,6x18 countersunk screws into the screw holes.



Step 5: Mount the Thermal Capture Grabber USB

Lift the assembly by holding the base plate and place it gently on the top of the FLIR Tau 2 core. Tighten the screws carefully. Do not apply strong forces to screws.



Congratulations! You have successfully mounted ThermalCapture Grabber USB 2.0 to your Tau core.

Please proceed with the chapters wiring and software configurations from the user guide.